

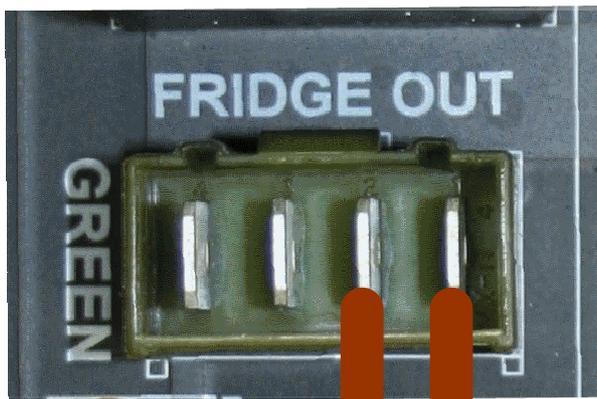


EM40 Fridge Configuration

- Locate the EM40 fuse box (behind the drivers seat).
- Locate the Green FRIDGE OUT socket.
- Unplug the connector.
- Using an extraction tool or jewellers screwdriver, release the 2 terminals in the plug on the right side (2x brown wires) and withdraw them.
- Reinsert the wires in the left side of the plug ensuring that the terminals click into position.
- Reinsert the plug into the socket and refit the EM40 unit.
- This change will cause the fridge to only operate from the 12V DC supply when the engine is running, therefore eliminating the risk of a customer accidentally discharging the vehicle battery by selecting '12V DC' when the vehicle is parked.

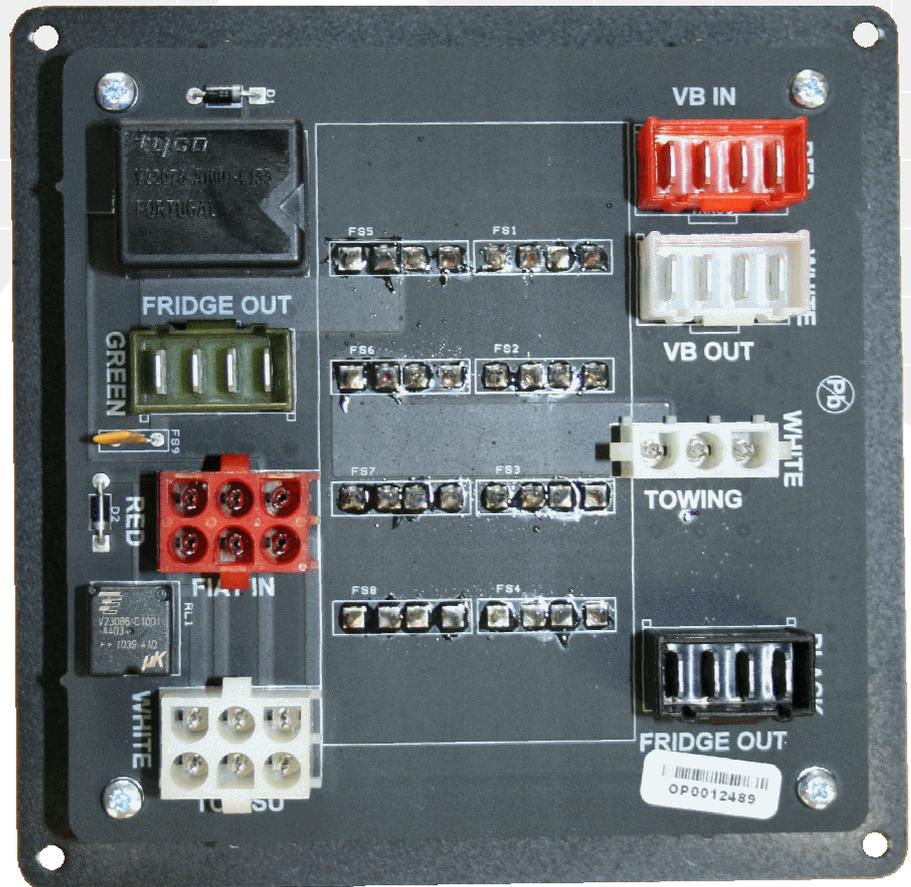

Old permanent position

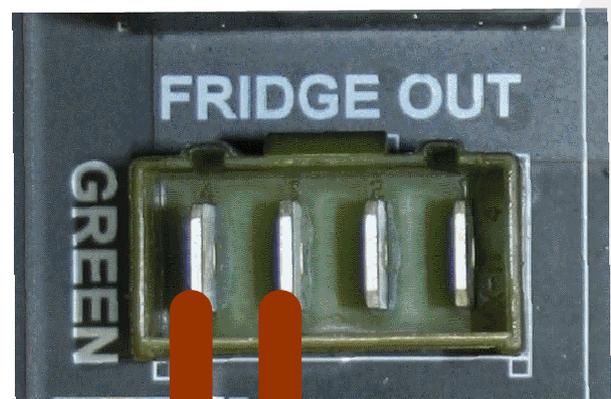

New switched position